

Interleaved 2 of 5 (I 2 of 5)

The following options apply to the I 2 of 5 symbology.


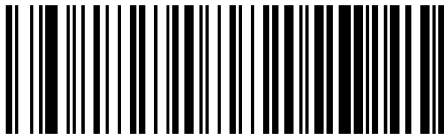
I 2 of 5 Enable/Disable

When disabled, the reader will not read I 2 of 5 bar codes.



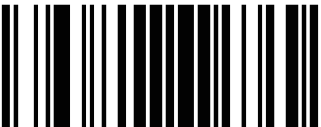
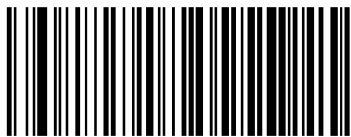
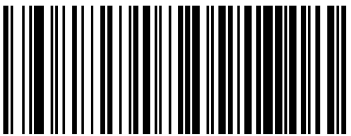
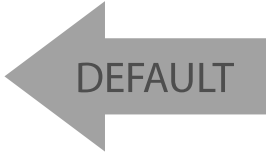
Interleaved 2 of 5 (I 2 of 5) — cont.

I 2 of 5 Check Character Calculation — cont.

 ENTER/EXIT PROGRAMMING MODE	
	 I 2 of 5 Check Character Calculation = Check Italian Post

I 2 of 5 Check Character Transmission

Enable this option to transmit the check character along with I 2 of 5 bar code data.

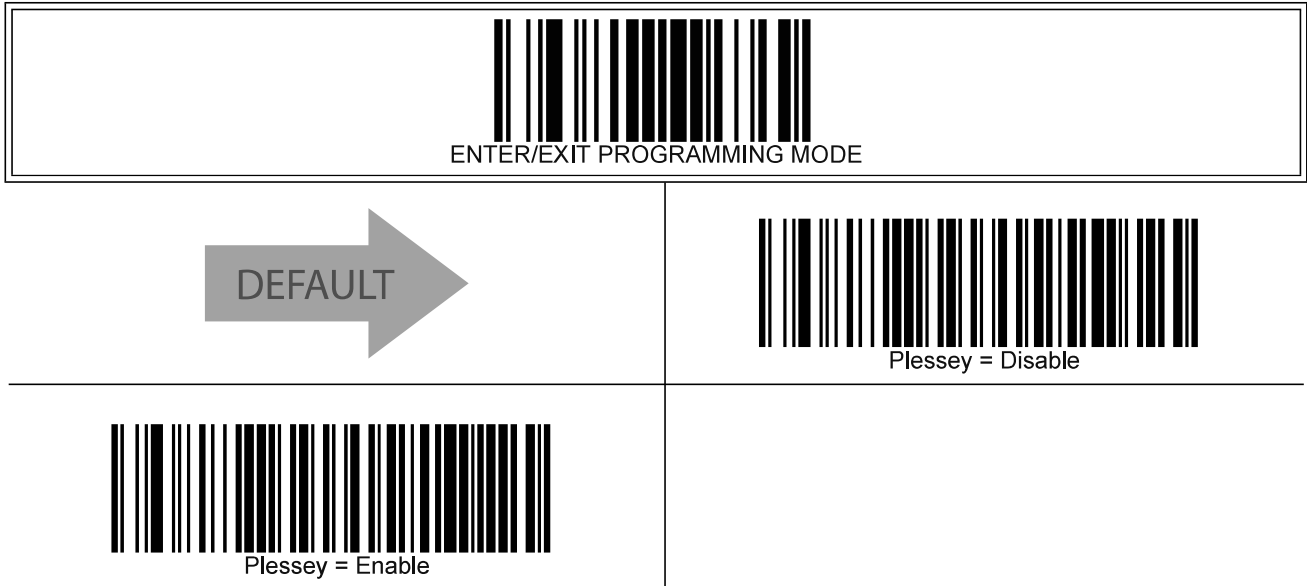
 ENTER/EXIT PROGRAMMING MODE	
	 I 2 of 5 Check Character Transmission = Don't Send
 I 2 of 5 Check Character Transmission = Send	 DEFAULT

Plessey

The following options apply to the Plessey symbology.

Plessey Enable/Disable




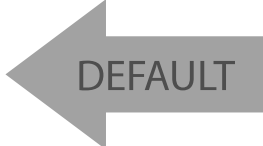


Enables/Disables ability of reader to decode Plessey labels.



Plessey — cont.

Plessey Check Character Calculation

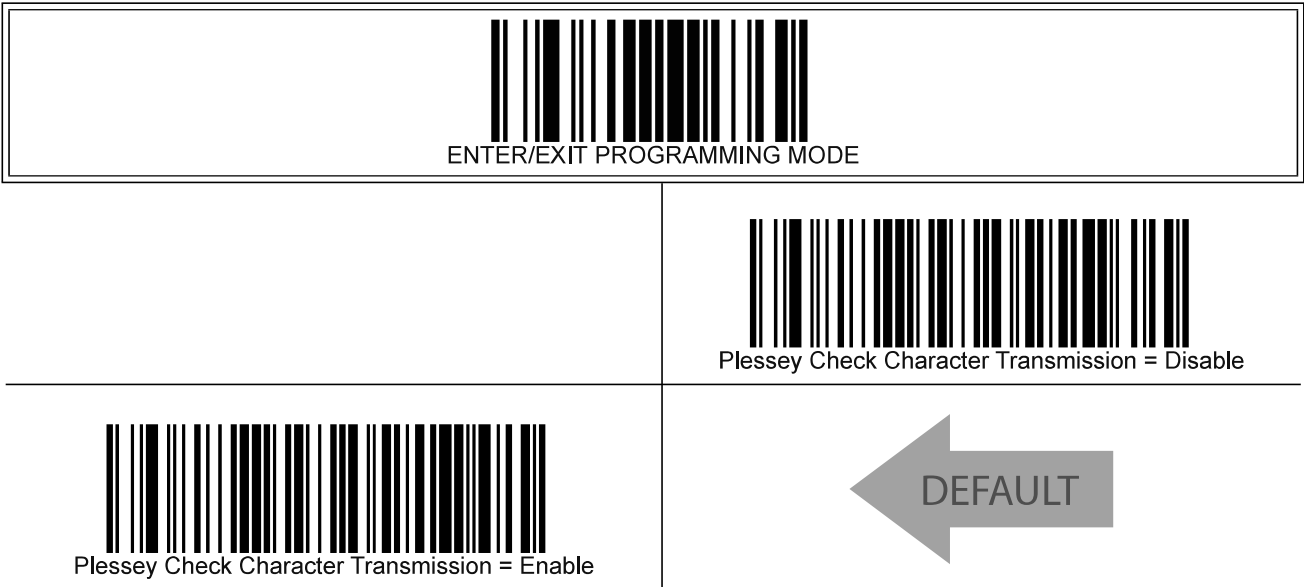
Enables/Disables calculation and verification of an optional Plessey check character.

 ENTER/EXIT PROGRAMMING MODE	
	 Plessey Check Character Calculation = Disable
 Plessey Check Character Calculation = Enable Plessey std. check char. verification	 DEFAULT
	 Plessey Check Character Calculation = Enable Anker check char. verification
 Plessey Check Character Calculation = Enable Plessey std. and Anker check char verification	

Plessey — cont.

Plessey Check Character Transmission

Enables/disables transmission of an MSI check character.



Plessey Length Control

This feature specifies either variable length decoding or fixed length decoding for the Plessey symbology.

Variable Length — For variable length decoding, a minimum and maximum length may be set.

Fixed Length — For fixed length decoding, two different lengths may be set.

